


# JOB SHACK HOLDING TANKS

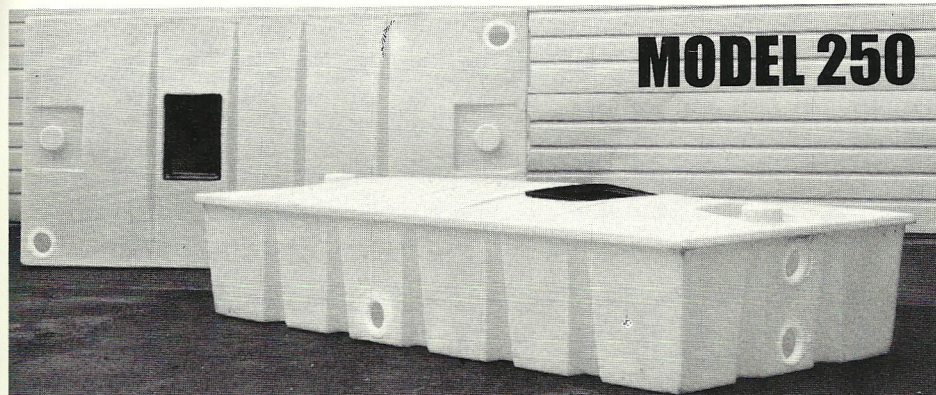


**MODEL 250** comes complete with seven 3" fittings and plugs, giving the option of hooking into a series to expand holding capacity. Two 4" C.I.T. nipples and a removable inspection port are included. Unit is designed to be used above ground only.

DIMENSIONS: 84" L x 17"H x 40"W

WEIGHT:..... 80 LBS

FITTINGS: 7 - 3" spin-ons with plugs.  
2 - 4" C.I.T. nipples.

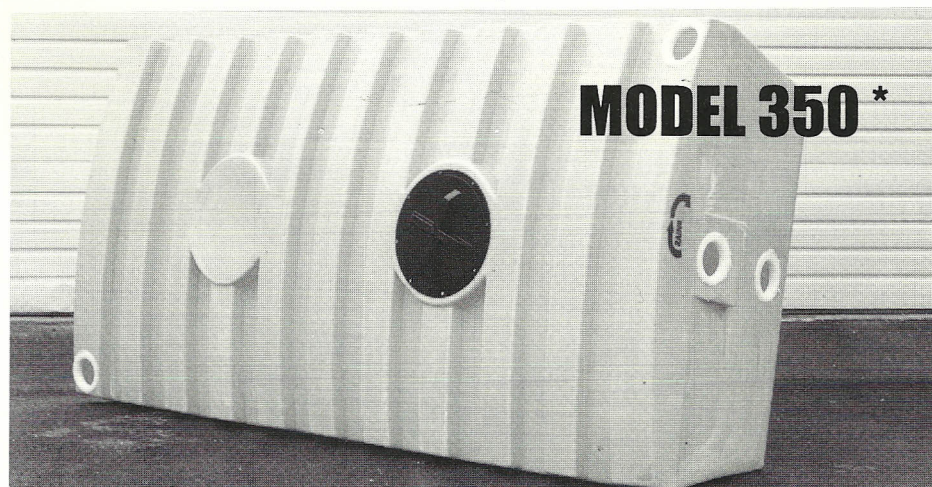

**MODEL 350 \*** polyethylene holding tank's unique ribbed design gives added strength. Seven 3" fittings and plugs, and a removable inspection port are included.

\* Model 350 is available as an above ground unit or below ground unit. Type of use must be specified when ordering.

DIMENSIONS: 89" L x 25"H x 44"W

WEIGHT: ABOVE GROUND ..... 100 LBS

BELOW GROUND ..... 140 LBS

FITTINGS: 7 - 3" spin-ons with plugs.

## Multiple Unit Set-Up for Increased Holding Capacity

By using bottom fittings, Tank #1 and Tank #2 will fill simultaneously. When #2 is to full level, float alarm will sound. Connecting top fittings on Tank #2 and Tank #3 will allocate Tank #3 as backup for overflow to allow time for pumping.

